


EASYbase

Fume extraction table with mechanical dampers

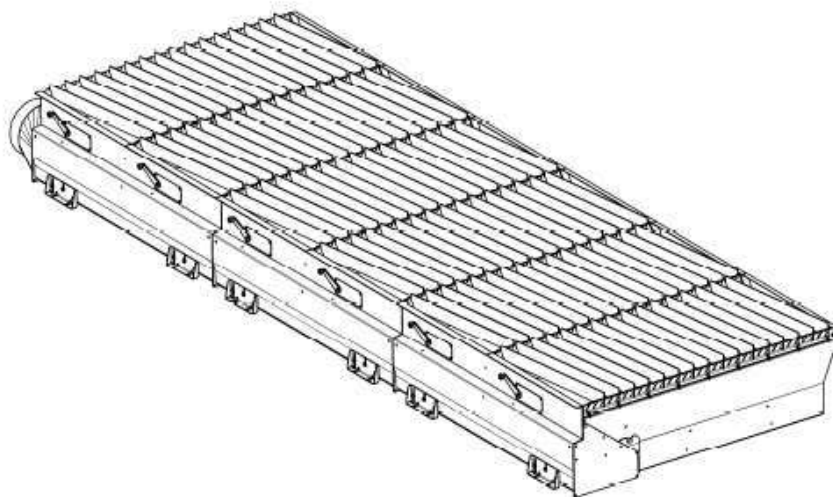

Available width

2100
2600
3100

Length :

2080
4160
6240
8320
10400
12480
14660
16640
18720
20800
24960

Application (see specification):
Plasma Cutting up to 260 Amps.
Oxyfuel Cutting up to 150 mm (Higher Load with stronger cutter bars possible)

Section length: 1050 mm, table height: 700 mm

Table elements liftable separately, damper duct fixed on floor
Sections equipped with closed bottom to avoid extraction air loss
Flat bars for plasma cutting, orientation lengthwise, dimension 100x6, insertion order 130 mm
Table outside primed and painted, semi mat, colour eligible, without structure
Table interior unpainted
with control rail for assembly to cutting machines wheelcase
with air duct connection piece for round duct diameter 400 or rectangular dim. 400x400
underfloor duct connection with flange dim. 290x600, selective
with compressed air filter-regulator with pressure switch for machine interlock
with adjustable feet to equalize floor level deviations
with copper terminal strip and brass bolts for grounding
transportation in stacks of max. 5 modules, with wooden bars.
Prices in €. Without tax and custom duties. EXW Bechtheim/Germany
After a new price table has been issued, all former prices loose their validity.
Our standard terms and conditions are valid.



Setting principle

